


## Omni-directional TETRA Band High Gain Fiberglass Collinear Antenna

AC12-460	450-470 MHz.	12 dBi. Gain
----------	--------------	--------------

**DESIGN FEATURES:** AC12-460 Fiberglass Omni-directional TETRA Band Collinear Antenna is rugged all weather model 6063T6 ultra corrosion resistant architectural aluminum, high class brass alloy and does not require any field tuning or adjustments. The antenna is supplied in two segments for easy of handling and shipping. The upper and lower portion of antenna is threaded together to prevent RF inter-modulation and antenna is completely protected within a high-tech ruggedized radome to ensure survivability in the worst environments. The antenna termination is enclosed at bottom of the antenna for complete weather protection.

**CONSTRUCTIONS:** The AC12-460 is a center fed design which eliminates the distortion of the radiation pattern and ensures a true omni-directional horizontal pattern. The special stub matching is used for smooth VSWR and constant 12dBi gain over the entire 450-470 MHz TETRA band. The collinear antenna consist of large diameter brass radiating elements stacked vertically, fed in phase and enclosed in fiber glass tube. The mounting hardware is made of type 316 marine grade stainless steel and supplied with the antenna. AC12-460 TETRA band fiber glass collinear antenna is suitable for side mounting on the tower and is supplied with mounting hardware, including a non metallic 1.2 Meters (4 feet) long horizontal arm to hold the fiberglass omni-directional antenna at the top.

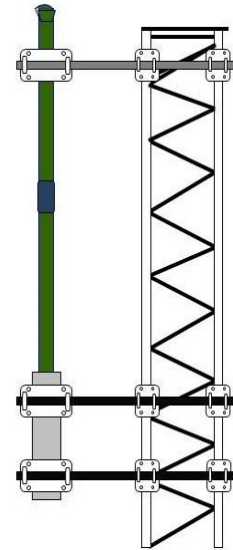

### ELECTRICAL SPECIFICATIONS:

Frequency Range	450 - 470 MHz.
Gain	10dBd. (12 dBi.)
Bandwidth	20 MHz.
Polarization	Vertical
Input Impedance	50 Ohms.
Radiation Pattern	Omni Directional
Vertical Beam-width –Half Power Points	7 Degrees
VSWR – Better Than	1:1.5
RF Power Handling Capacity	250 Watts.
Input Termination	N-Female

### MECHANICAL SPECIFICATIONS:

Mounting Hardware	Marine Grade Stainless Steel
Net Weight	8 Kgs.
Gross Weight with Mounting Hardware	20 Kgs
Wind Rating	200 Km/Hr.
Overall Length	5.3 Meters
Shipping Length	2.7 Meters
Support Pipe Materials	6063T6 Aluminum
Maximum Mount Pipe Diameter	51 mm (2 Inches)
Enclosure Materials	Fiberglass
Enclosure Outer Diameter	45 mm
Enclosure Length	4900 mm

### ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature	(-) 30 to +70 Degrees Celsius
Storage Temperature	(-) 40 to +80 Degrees Celsius
Humidity	0 to 95% RH

Please contact us for further information like Azimuth & Elevation radiation patterns & frequency Vs VSWR of antenna.

Note: All information contained in the datasheet is subject to change without any prior notice.