



# ANTENNA EXPERTS

E-mail: [info@antennaexperts.in](mailto:info@antennaexperts.in) Website: [www.antennaexperts.in](http://www.antennaexperts.in)


Model # AWD-50-500

50 – 500 MHz.

Unity Gain

## WIDE BAND DISCONE ANTENNA

**DESIGN FEATURES:** AWD-50-500 wide band discone antenna uses 6063T6 ultra corrosion resistant architectural aluminum alloy and is specially designed for omni-directional coverage. Due to its low VSWR through entire band from 50-500 MHz, this discone antenna can be used as a transmitting and receiving antenna with high efficiency, to meet the broadband requirement of a base station antenna such as spectrum monitoring or jamming application. The wide band discone antenna when packed comes with cone and disc elements removed from the antenna body for ease of packing and shipment.

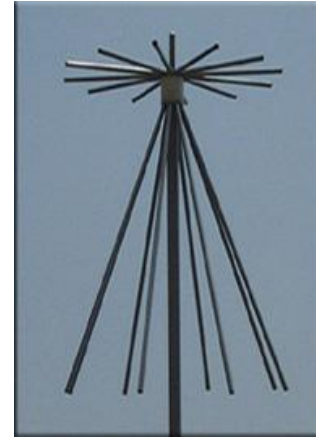

**CONSTRUCTION:** AWD-50-500 wideband discone antenna is rugged all weather model, does not require any field tuning or adjustments. The compact size of discone antenna allows easy handling and specially designed mounting hardware results in fast installation. The cone and disc hubs of wide band discone antennas are made of chromium plated brass and all fasteners are of type 316 marine grade stainless steel. Discone Antenna termination and feed cable lie enclosed inside the mounting pipe for complete weather protection.

### ELECTRICAL SPECIFICATIONS:

Frequency Range	50 -500 MHz.
Gain	2.14 dBi.
Bandwidth	Entire Band
Polarization	Vertical
Input Impedance	50 Ohms
Radiation Pattern	Omni-Directional
Vertical Beam-width –Half Power Points.	76 Degrees
VSWR	<1:2
RF Power Handling Capacity	500 Watts
Input Termination	N-Female

### MECHANICAL SPECIFICATIONS:

Materials	6063T6 Aluminum
Mounting Hardware -Materials	Marine Grade Stainless Steel
Weight Approx	8 Kgs.
Wind Rating	200 Km/Hr.
Overall Length	2.0 Meters
Shipping Length	1.6 Meters
Support Pipe Materials	Stainless Steel
Insulator Materials	Teflon & Nylon
Maximum Mount Pipe Diameter	52 mm (2 Inches)

### ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature	(-)30 to +70 Degrees Celsius
Storage Temperature	(-)40 to +80 Degrees Celsius
Humidity	0 to 95 % RH

Note: All information contained in the datasheet is subject to change without any prior notice.