



# ANTENNA EXPERTS

E-mail: [info@antennaexperts.in](mailto:info@antennaexperts.in) Website: [www.antennaexperts.in](http://www.antennaexperts.in)

Model JC7-5159

5100 – 5900 MHz.

7 dBi. Gain

## HIGH GAIN RCIED VEHICULAR MOUNT JAMMER COLLINEAR ANTENNA

**DESIGN FEATURES:** The JC7-5159 RCIED Jammer Vehicular Collinear Antenna is rugged all weather model, enclosed in a Fiber Glass enclosure, uses 6063T6 ultra corrosion resistant architectural aluminum alloy and high quality brass radiating elements. The high gain RCIED jammer collinear antenna does not require any field tuning or adjustments. This fiber glass jammer collinear antenna is specially designed to mount on the side of the vehicle with the help antenna adaptor base plate. The antenna uses standard NATO 4 holes pattern base which is suitable to mount the antenna directly on the antenna adaptor base plate. Similarly the antenna can also be supplied with pole mounting hardware for base station application and direct equipment mount for manpack application (optional).



**CONSTRUCTIONS:** The special co-axial stub and spark gap techniques are used for smooth VSWR and 7dBi. gain at centre of the 5100 - 5900 MHz frequency band. The JC7-5159 high gain jammer collinear antenna consists of large diameter brass radiating elements stacked vertically, fed in-phase and enclosed in fiber glass housing. The Fiber Glass has excellent transparency for Radio Signal and mechanically Robust to support extra mechanical strength to the jammer collinear antenna. The antenna is supplied with olive green color.

**Optional:** The antenna can also be supplied with bi-conical spring fitted at the base of antenna for flexibility during obstacle. Part # is JCS7-5159 with spring fitted at base. Add 150mm in overall length and add 350 Grams in gross weight.

### ELECTRICAL SPECIFICATIONS:


Frequency Range	5100 - 5900 MHz.
Gain @ Low/Mid/High	5/7/5 dBi
Bandwidth	Entire Band
Polarization	Vertical
Input Impedance	50 Ohms
Radiation Pattern	Omni-Directional
Vertical Beam-width –Half Power Points	13 +/-5 Degrees
VSWR – Better Than	2.5:1
RF Power Handling Capacity	200 Watts.
Input Termination	N-Female

### MECHANICAL SPECIFICATIONS:

Mounting Hardware Fasteners	Marine Grade Stainless Steel
Weight Approx	750 Grams
Wind Rating	150 Km/Hr.
Overall Length	400 mm
Shipping Length	500 mm
Support Pipe Outer Diameters	52 mm
Support Pipe Materials	6063T6 Aluminum Alloy
Radiating Materials	All High Quality Brass
Mounting Type	Standard NATO 4 Holes Pattern
Enclosure Materials	Fiberglass
Fiber Glass Enclosure Outer Diameter	19mm

### ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature	(-) 30 to +70 Degrees Celsius
Storage Temperature	(-) 40 to +80 Degrees Celsius
Humidity	0 to 95% RH

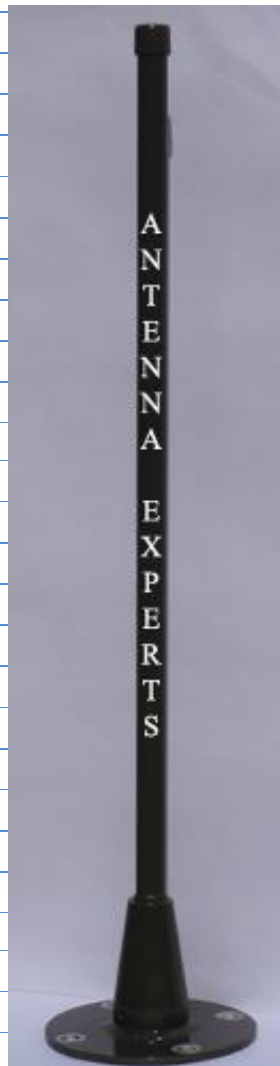

Note: All information contained in the datasheet is subject to change without any prior notice