



ANTENNA EXPERTS

E-mail: info@antennaexperts.in Website: www.antennaexperts.in

Model # JCS10-2650 2600 – 2700 MHz. 10 dBi. Gain

HIGH GAIN VEHICULAR MOUNT OMNI-DIRECTIONAL JAMMER COLLINEAR ANTENNA


DESIGN FEATURES: The JCS10-2650 high gain vehicular mount jammer collinear antenna is rugged all weather model, enclosed in a ABS radome, uses 6063T6 ultra corrosion resistant aluminum alloy and does not require any field tuning or adjustments. The support pipe and mounting flange are supplied with powder coating finish to protect it further from severe environmental conditions. The compact size of omni-directional antenna allows easy handling, shipping and highly suitable for transmitting, monitoring, scanning and Jamming application without having the requirement of multiple antennas. Cylindrical enclosure is used for low wind loading and for minimal effect of ice formation on the antenna operation as well as providing an aesthetically pleasing appearance.

CONSTRUCTIONS: The high gain omni-directional vehicular mount jammer collinear antenna is supplied complete in assembled condition. This jammer antenna has smooth VSWR and constant Gain over the 2600-2700 MHz frequency band. The JCS10-2650 jammer collinear antenna consists of ultra corrosion resistant radiating elements and enclosed in ABS housing. The ABS has excellent transparency for Radio Signal and mechanically Robust to support extra mechanical strength to the jammer collinear antenna.

MOUNTING: The antenna is supplied with standard NATO 4 holes mounting pattern with stainless steel spring fitted at the base of antenna making it rigid to withstand tough MIL environmental condition. The N-Female termination of antenna is provided at the bottom of mounting flange.

ELECTRICAL SPECIFICATIONS:

Frequency Range	2600 - 2700 MHz.
Gain	10 dBi.
Bandwidth	Entire Band
Polarization	Vertical
Input Impedance	50 Ohms.
Radiation Pattern	Omni-directional
Vertical Beam-width -Half Power Points	9 Degrees
VSWR – Better Than	2.0:1
RF Power Handling Capacity	100 Watts CW
Input Termination	N-Female

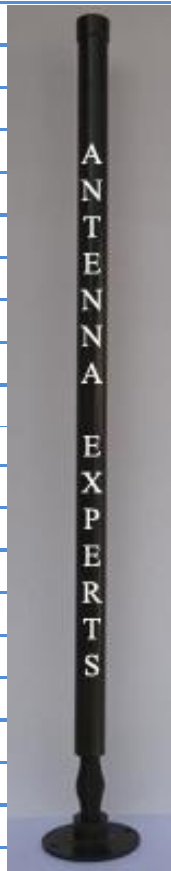

MECHANICAL SPECIFICATIONS:

Wind Rating	100 Km/Hr.
Mounting Type	NATO 4 Holes Pattern
Overall Length	1.25 Meters
Radiating Elements Materials	High Quality Brass
Diameter of Radome	45 mm
Support Pipe Materials	6063T6 Aluminum Alloy
Spring Materials	Steel
Enclosure Materials	ABS
Colour / Finishing	Military Green/Tan Brown
Gross Weight	2 Kgs.

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature	MIL-STD-810F, (-) 10 to +65 Degrees Celsius
Storage Temperature	MIL-STD-810F, (-) 20 to +75 Degrees Celsius
Humidity	MIL-STD-810F, Method 507.4

Please contact us for further information like VSWR curve, Radiation Pattern, Full Environmental Specs and Drawing

Note: All information contained in the datasheet is subject to change without any prior notice.